


100 to 75Ω      5 to 2800 MHz

## The Big Deal

- Very wide bandwidth, 5 to 2800 MHz
- Very good return loss over entire band
- Convenient 100/75Ω matching over a wide range of frequencies



CASE STYLE: AT224-1

## Product Overview

The TC1.33-282+ is a mini wideband tri-filar transformer, measuring approximately 4 mm on all sides. The plastic substrate, 5-pad design is aqueous washable and RoHS compliant, featuring a square core and all welded wire construction for repeatability and reliability in balanced-to-unbalanced 100/75Ω implementations.

Feature	Advantages
Very wide bandwidth	5-2800 MHz bandwidth useful for CATV (forward & return), medical wireless and D2A/A2D, and communications applications
Excellent amplitude and phase unbalance	0.3 dB amplitude and 6° phase unbalance aid rejection of even harmonics (in push-pull amplifiers) and common mode signals (when used as a balun)
Good return loss	Efficient signal path across 100/75Ω transitions
Low and flat insertion loss	Flatness ±0.1 dB across 50-1000 MHz CATV bands preserves gain flatness after impedance transformation



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

**Notes:** 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

# Balanced to Unbalanced RF Transformer

## TC1.33-282+

100 to 75Ω      5 to 2800 MHz

### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25W
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.

### Pin Connections


PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	1
SECONDARY	3
NOT USED	2

### Features

- suitable for tin/lead and RoHS solder systems
- wideband, 5 to 2800 MHz
- balanced transmission line
- good return loss, 20 dB typ. at 1 dB band
- excellent amplitude unbalance, 0.3 dB typ.
- aqueous washable

### Applications

- balanced to unbalanced transformation
- push-pull amplifiers
- PCS/DCS
- cable TV
- cellular




CASE STYLE: AT224-1  
PRICE: \$2.89 ea. QTY (20)  
\$1.89 ea. QTY (100)

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Available Tape and Reel at no extra cost	
Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500
13"	1000, 2000

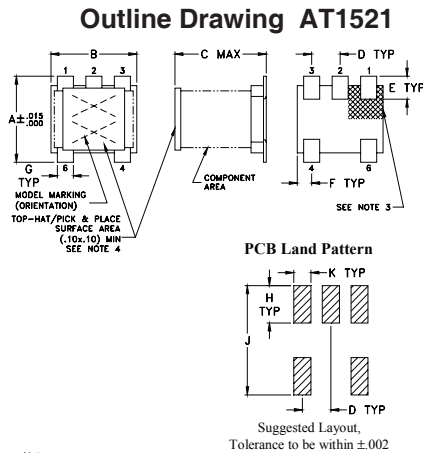

- Notes:
1. Case Material: Plastic
  2. Termination Finish: Tin plate over Nickel plate.
  3. Lead#1 identifier shall be located in the cross-hatched area shown, on bottom view. Identifier may be either a molded or marked feature.
  4. Top-Hat total thickness: .013 inches max.

### Outline Dimensions (inch/mm)

A	B	C	D	E	F
.150	.150	.160	.050	.040	.025
3.81	3.81	4.06	1.27	1.02	0.64
G	H	J	K	wt	
.028	.065	.190	.030	grams	
0.71	1.65	4.83	0.76	0.15	

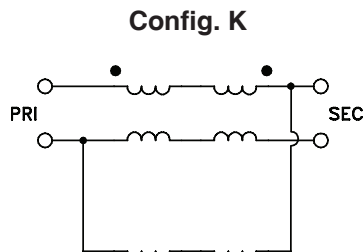



### Electrical Specifications at 25°C, 75Ω

Ω RATIO (Secondary/Primary)	FREQUENCY (MHz)	INSERTION LOSS*			PHASE UNBALANCE (Deg.) Typ.		AMPLITUDE UNBALANCE (dB) Typ.	
		3 dB MHz	2 dB MHz	1 dB MHz	1 dB bandwidth	2 dB bandwidth	1 dB bandwidth	2 dB bandwidth
1.33	5-2800	5-2800	30-2000	50-1500	6	6	0.3	1.0

\*Insertion Loss is referenced to mid-band loss, 1.0 dB typ. Measured in 75Ω system.

### Typical Performance Data, 75Ω

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
5.00	1.48	17.72	0.38	3.28
10.00	1.20	21.95	0.21	2.17
30.00	1.08	27.05	0.11	0.55
50.00	1.08	28.04	0.09	0.06
100.00	1.09	28.09	0.08	1.09
500.00	0.99	24.29	0.21	5.00
1000.00	0.97	22.66	0.07	6.34
1500.00	1.20	22.41	0.71	5.18
2000.00	1.64	21.22	1.49	1.64
2400.00	2.13	17.79	2.00	3.40
2800.00	2.76	13.83	2.31	10.70

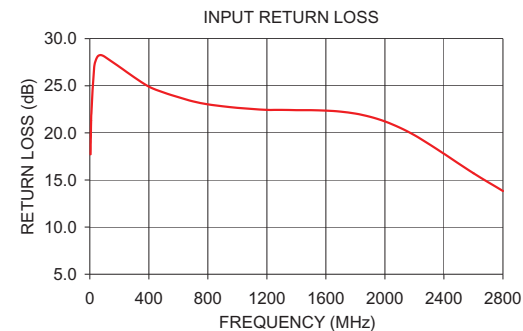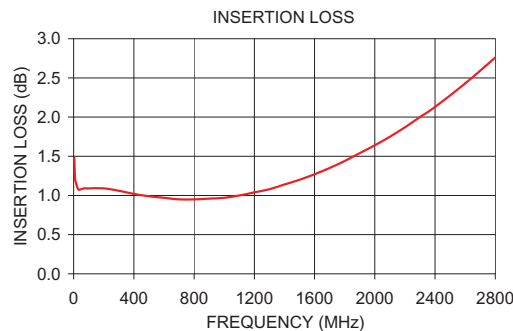

**Mini-Circuits®**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED  
IFIRF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine [minicircuits.com](http://www.minicircuits.com) Provides ACTUAL Data Instantly at [minicircuits.com](http://www.minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

REV. OR  
M126191  
TC1.33-282+  
ED-13828/1  
IG/CP/AM  
120508  
Page 2 of 2