



Typical Performance Curves


GAIN vs. FREQUENCY & TEMPERATURE
INPUT POWER = -25dBm, I_d = 65mA

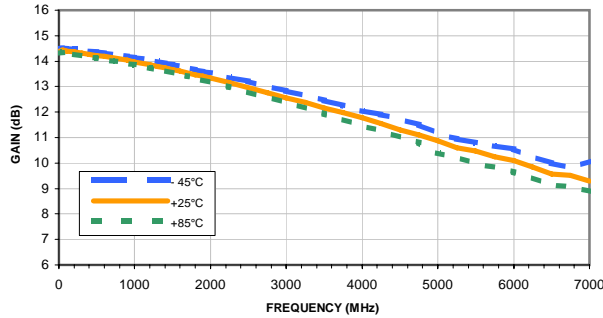


GAIN vs. FREQUENCY & DEVICE CURRENT
INPUT POWER = -25dBm, Temperature = +25°C

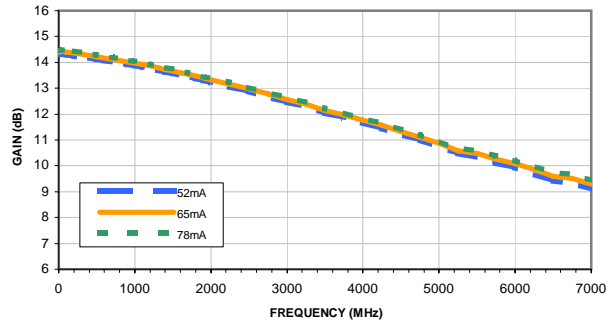


ISOLATION vs. FREQUENCY & TEMPERATURE
INPUT POWER = -25dBm, I_d = 65mA

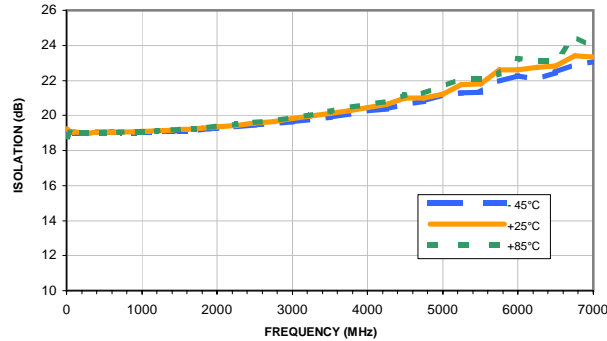


ISOLATION vs. FREQUENCY & DEVICE CURRENT
INPUT POWER = -25dBm, Temperature = +25°C

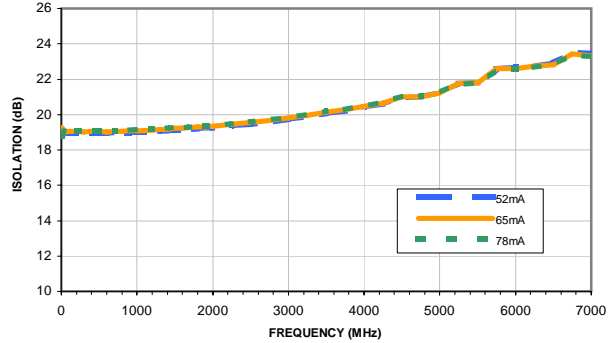


INPUT RETURN LOSS vs. FREQUENCY & TEMPERATURE
INPUT POWER = -25dBm, I_d = 65mA

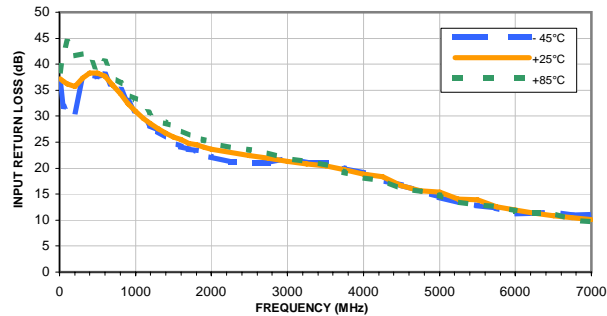


INPUT RETURN LOSS vs. FREQUENCY & DEVICE CURRENT
INPUT POWER = -25dBm, Temperature = +25°C

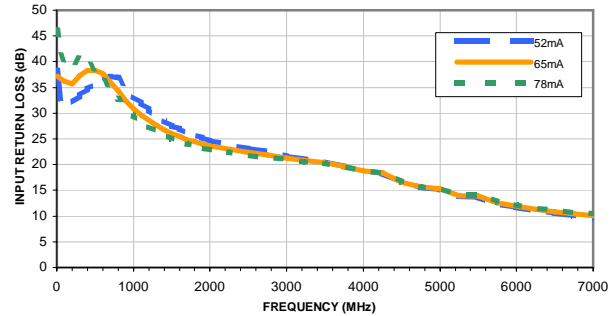

OUTPUT RETURN LOSS vs. FREQUENCY & TEMPERATURE
INPUT POWER = -25dBm, I_d = 65mA

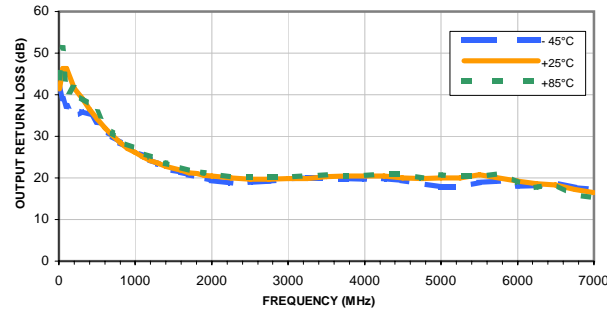

OUTPUT RETURN LOSS vs. FREQUENCY & DEVICE CURRENT
INPUT POWER = -25dBm, Temperature = +25°C

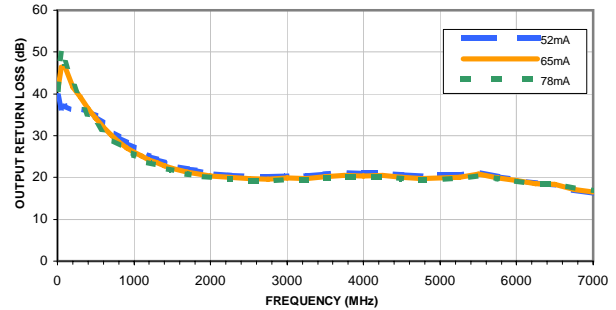

Typical Performance Curves

