

# X3 Frequency Multiplier

RMK-3-93+

50Ω Output 5400 to 9000 MHz

## The Big Deal

- Broadband tripler for 5.4-9 GHz signal production
- High rejection of F2 and F4 (-55 dBc typ)
- Low conversion loss, 15 dB typ
- Outstanding performance at a low price



CASE STYLE: TT1224

## Product Overview

The RMK-3-93+ is a broadband frequency tripler offering excellent performance for C- to X-band signals. The aqueous washable and RoHS-compliant package features rugged, wire-welded construction, in a small 0.25" x 0.31" x 0.16" plastic case.

## Key Features

Feature	Advantages
Broad bandwidth	Ideal for satellite up- and down-converters and line-of-sight communication links, as well as items operating in the 8.5-9.0 GHz radiolocation band
High rejection of F2 and F4	Proprietary internal circuitry achieves high harmonic suppression, keeping filtering requirements to a minimum
Low conversion loss	High output reduces external gain requirements after frequency tripling.
Low price	Practical, low cost solution for providing high frequency sources from lower frequency VCOs and synthesizers.



For detailed performance specs  
& shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

IF/RF MICROWAVE COMPONENTS

**Notes:** 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

# X3 Frequency Multiplier

50Ω Output 5400 to 9000 MHz

## RMK-3-93+



CASE STYLE: TT1224  
PRICE: \$8.95 ea. QTY (10-49)

**+ RoHS compliant in accordance with EU Directive (2002/95/EC)**

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	17 dBm

Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

INPUT	1
OUTPUT	4
GROUND	2,3,5,6


### Outline Drawing

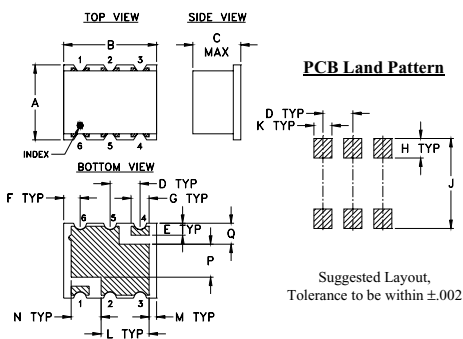

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
.25	.31	.16	.100	.040	.055	.060	.065
6.35	7.87	4.06	2.54	1.02	1.40	1.52	1.65
J	K	L	M	N	P	Q	wt.
.300	.060	.160	.025	.100	.110	.070	grams
7.62	1.52	4.06	0.64	2.54	2.79	1.78	0.16

### Demo Board MCL P/N: TB-393 Suggested PCB Layout (PL-258)

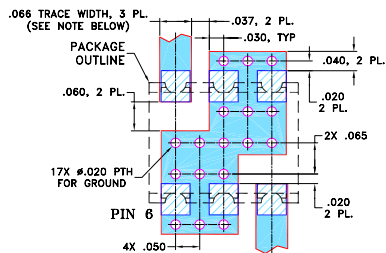

### Features

- broadband
- high rejection F2 & F4, -55 dBc typ.
- low cost
- aqueous washable

### Applications

- synthesizers
- local oscillators
- satellite up and down converters





### Electrical Specifications

MULTIPLICATION FACTOR	FREQUENCY (MHz)		INPUT POWER (dBm)		CONVERSION LOSS (dB)		*HARMONIC OUTPUT (dBc)					
	F1 Input	F3 Output	Min.	Max.	Typ.	Max.	F1 Typ.	F2 Typ.	F4 Typ.			
3	1800-3000	5400-9000	7	11	15	19.5	6	-6	55	35	55	35

\* Harmonics of input frequency below the power level of F3

### Typical Performance Data

Input Frequency (MHz)	INPUT RF= 7 dBm				INPUT RF= 11 dBm			
	Conversion Loss (dB)	Harmonic Output Below F3 (-dBc)			Conversion Loss (dB)	Harmonic Output Below F3 (-dBc)		
		F1	F2	F4		F1	F2	F4
1800.00	16.94	5.94	64.33	62.56	15.79	9.86	73.68	61.49
1900.00	16.48	5.52	63.05	58.30	15.12	9.69	73.46	60.98
2000.00	15.62	5.58	65.59	58.27	14.78	9.29	72.77	61.61
2100.00	15.03	5.24	67.56	57.08	14.46	8.70	70.70	60.24
2200.00	14.88	4.66	65.40	54.92	14.37	8.01	67.50	60.03
2287.50	14.73	4.02	64.99	54.30	15.04	6.58	66.22	58.98
2325.00	14.68	3.86	66.04	54.86	15.30	6.15	66.18	58.85
2400.00	14.51	3.38	67.92	55.19	15.39	5.45	65.72	57.81
2450.00	14.72	2.95	67.05	54.79	15.36	5.22	64.01	57.96
2500.00	14.79	2.57	65.67	53.79	15.49	4.78	62.00	57.62
2550.00	14.53	2.48	66.05	53.40	15.30	4.62	60.87	57.76
2600.00	14.43	2.23	66.21	52.72	15.14	4.40	60.52	57.74
2650.00	14.42	1.93	68.53	51.96	14.83	4.38	62.14	59.76
2700.00	14.12	1.94	71.91	52.32	14.81	4.09	65.47	62.24
2750.00	13.82	1.89	67.73	52.40	14.49	4.08	68.87	63.23
2800.00	13.85	1.62	62.77	52.06	14.45	3.86	69.45	62.33
2850.00	14.05	1.18	59.98	51.75	14.68	3.39	67.86	60.15
2900.00	14.07	0.82	58.96	51.55	14.93	2.81	66.70	58.49
2955.00	14.33	0.35	57.62	50.67	15.08	2.45	66.24	57.64
3010.00	14.90	0.57	56.61	49.65	15.68	1.47	65.11	56.28

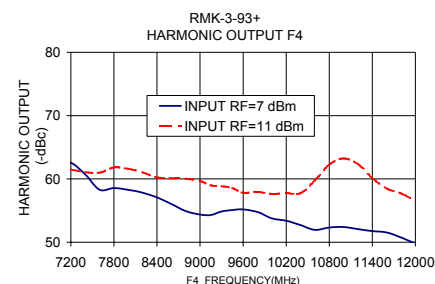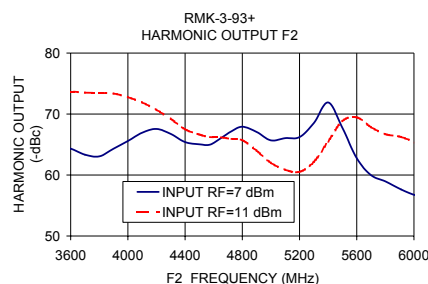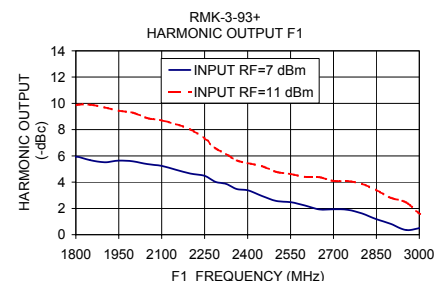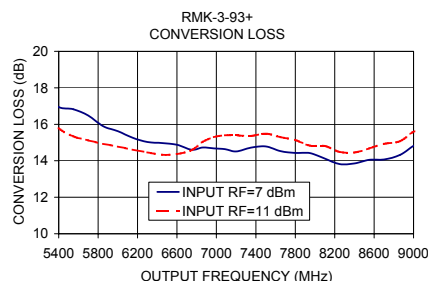

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

REV. OR  
M126795  
RMK-3-93+  
ED-13611  
DJ/CP/AM  
110131