

Surface Mount Phase Detector

SYPD-52W+

50Ω High Output 300 to 650 MHz




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Input Power	50 mW
Peak IF current	20 mA

Pin Connections

RF REF (RF2)	2
RF IN (RF1)	1
DC OUT (I)	3
GROUND	4,5,6


Outline Drawing

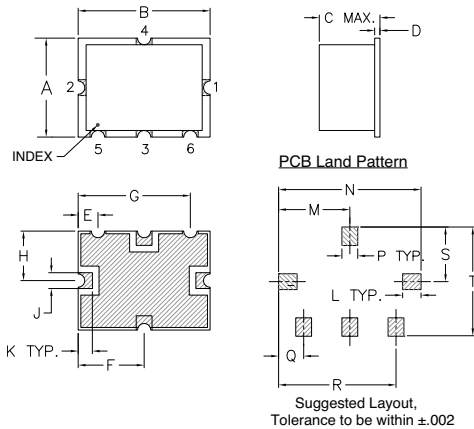

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.38	.50	.23	.020	.075	.250	.425	.187	.050	.050	.070	.270	.540	.060	.095	.445	.208	.415	grams
9.60	12.70	5.84	0.51	1.91	6.35	10.80	4.75	1.27	1.27	1.78	6.86	13.72	1.52	2.41	11.30	5.28	10.54	0.8

Demo Board MCL P/N: TB-12 Suggested PCB Layout (PL-079)

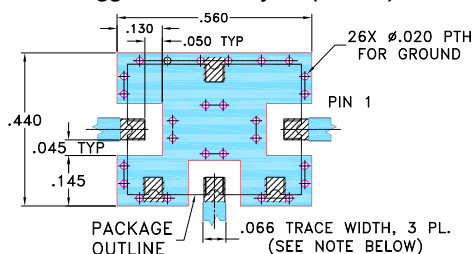

- NOTE:
- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS $.030'' \pm .002''$; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - GROUND PAD SHALL BE FREE OF SOLDER MASK IF REQUIRED FOR SOLDERING.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
 - DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER), SEE NOTE 2.
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- frequency range, 300 to 650 MHz
- high DC output, 900 mV typ.

Applications

- monitoring circuits
- leveling circuits
- PLL




+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Phase Detector Electrical Specifications


FREQUENCY (MHz)	POWER IN RF1 RF2 (dBm)	SCALE FACTOR mV/deg.	IMPEDANCE (ohms) Output Load I	ISOLATION (dB) RF1/RF2 Min.	OUTPUT POLARITY RF1/RF2 In - Phase	DC OUTPUT (mV)				FIGURE OF MERIT Typ.	
						Max. Typ.	Offset Typ.	Max. Typ.	Max. Typ.		
300-400	DC-50	+7	8	500	34	neg.	850	700	0.9	4.0	129
400-500	DC-50	+7	8	500	30	neg.	900	750	0.7	2.5	129
500-650	DC-50	+7	8	500	28	neg.	850	700	1.0	5.0	129

Typical Performance Data

Frequency (MHz)	DC Output mV		DC Offset mV		RF1-RF2 Isolation (dB) X
	\bar{X}	σ	\bar{X}	σ	
300.0	-806.7	10.04	1.09	0.52	49.54
325.0	-838.5	9.84	0.93	0.46	48.86
340.0	-852.0	9.52	0.80	0.42	48.41
355.0	-859.3	9.22	0.65	0.37	47.98
385.0	-872.0	8.24	0.39	0.32	47.04
400.0	-877.0	7.60	0.29	0.35	46.44
430.0	-891.6	7.18	0.17	0.45	45.36
450.0	-897.9	6.93	0.16	0.54	44.73
485.0	-900.5	6.57	0.19	0.70	43.64
500.0	-898.7	6.49	0.16	0.77	43.23
550.0	-876.4	6.16	-0.27	1.04	41.80
585.0	-863.3	6.63	-0.62	1.20	41.11
602.5	-850.1	6.95	-0.83	1.26	40.74
620.0	-832.6	7.64	-1.06	1.37	40.47
650.0	-818.3	8.97	-1.13	1.60	40.13

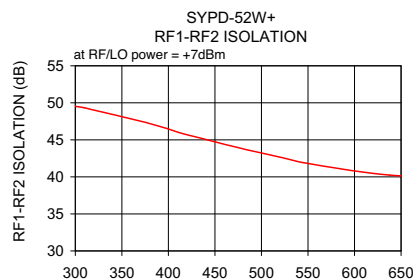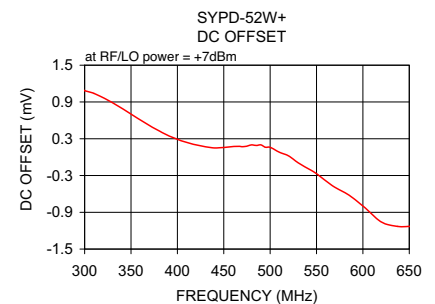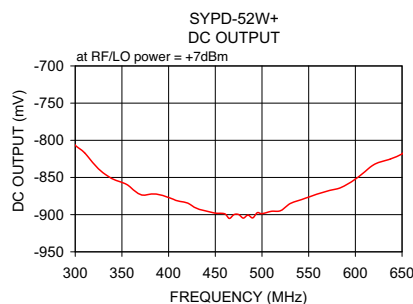

electrical schematic

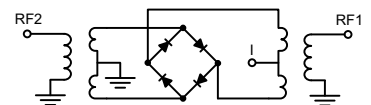

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

